



EAL



Trusted for Generations



HYDROX BIO: The IdEAL Solution

www.vickers-oil.com

HYDROX BIO: The IdEAL Solution





The Environmentally Acceptable Sterntube Lubricant delivering superior performance and wear protection even when water ingress occurs

For sterntubes, stabiliser bearings and CPP hubs

- Verified lubrication at high water levels
- Protects bearings against corrosion
- Excellent wear protection
- ISO 68, 100, 150 & 220

HYDROX BIO lubricants are biodegradable lubricants based on synthetic esters, developed primarily for use in sterntubes and bearings where water ingress may occur. The products provide:


- Superior level of lubrication even when water ingress occurs
- Excellent wear protection
- Excellent corrosion protection
- Compatibility with metals commonly used
- Biodegradable and non-toxic

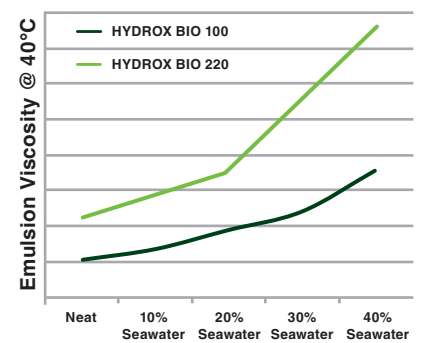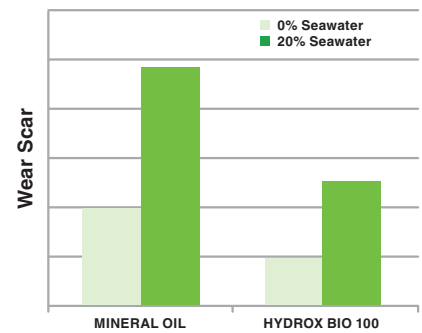

Product	Description	Typical Viscosity (cSt @40°C)	Viscosity Index	Density (kg/l @15°C)	Pour Point ASTM D7346 (°C)	Anti corrosion SKF Water Emcor Test	VGP Compliant	Emulsifiable
HYDROX BIO 68	Emulsifiable, biodegradable sterntube lubricant for regular use and lubrication of some stabiliser bearings and CPP hubs.	68	215	0.92	< -24	Passes	✓	✓
HYDROX BIO 100	Emulsifiable, biodegradable sterntube lubricant for regular use and lubrication of some stabiliser bearings and CPP hubs.	100	187	0.93	< -24	Passes	✓	✓
HYDROX BIO 150	Emulsifiable, biodegradable sterntube lubricant for regular use and lubrication of some stabiliser bearings and CPP hubs.	150	181	0.93	< -24	Passes	✓	✓
HYDROX BIO 220	Emulsifiable, biodegradable sterntube lubricant for use in the event of outboard leakage.	220	200	0.93	< -24	Passes	✓	✓



Celebrating 20 YEARS

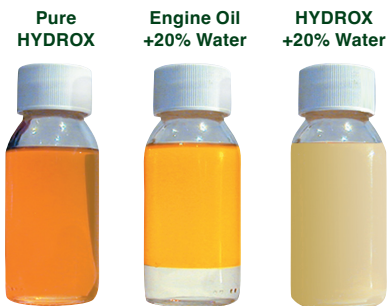

Using HYDROX BIO lubricants dramatically reduces wear to stern tube bearings in the event of seawater ingress.

HYDROX BIO lubricants will absorb sea or fresh water entering the stern tube to form a fluid emulsion. This reduces the risk of free water being present and continues to provide the required lubrication and corrosion protection. (Conventional oils do not emulsify in the same way and tend to separate, exposing components to free water and potential wear damage.)

HYDROX BIO lubricants achieve a biodegradability of greater than 60% in the 28 day OECD 301B and OECD 306 tests and are considered non-toxic in the marine environment based on the following results:

Fish LC50 exceeds 1000mg/l;
Daphnia EC50 exceeds 1000mg/l;
Algae EC50 exceeds 1000mg/l.

HYDROX BIO meets the detailed ecological definitions and requirements laid down in the 2013 Vessel General Permit (VGP) published by the US EPA in March 2013.

HYDROX BIO lubricants (both neat oil and emulsion including 20% water contamination) have been successfully tested by Class and their stability, lubricating and corrosion protection performance have been verified by Lloyds Register.

HYDROX BIO 68, 100 & 150

HYDROX BIO 68 and HYDROX BIO 100 are the viscosity grades generally recommended by the bearing and seal manufacturers for regular running in the stern tube. They can also be used in certain stabiliser systems and CPP hubs.

HYDROX BIO 150 is for use if the shipyard recommends an ISO VG 150 stern tube EAL in order to give improved oil film thickness under severe conditions as may arise if the aft bearing is subject to edge loading. This can

occur when the design tolerances or other factors are marginal.

These products are approved by many of the leading OEMs such as SKF Marine, Wärtsilä and Kemel for up to 5 years when used with OEM elastomers recommended for EALs. For specific details please contact us.


HYDROX BIO 220

HYDROX BIO 220 has become widely accepted as the lubricant of choice should vessels require emergency assistance in reducing leakage from the stern tube past a damaged or worn aft seal. It outperforms other competing biodegradable leak reducing lubricants by forming a stable, high viscosity emulsion at the point of water entry.

In the majority of cases a significant reduction in leakage rate can be achieved, typically up to 70%. The lubricant offers the greatest benefit when used to completely fill the stern tube system.



Trusted for Generations

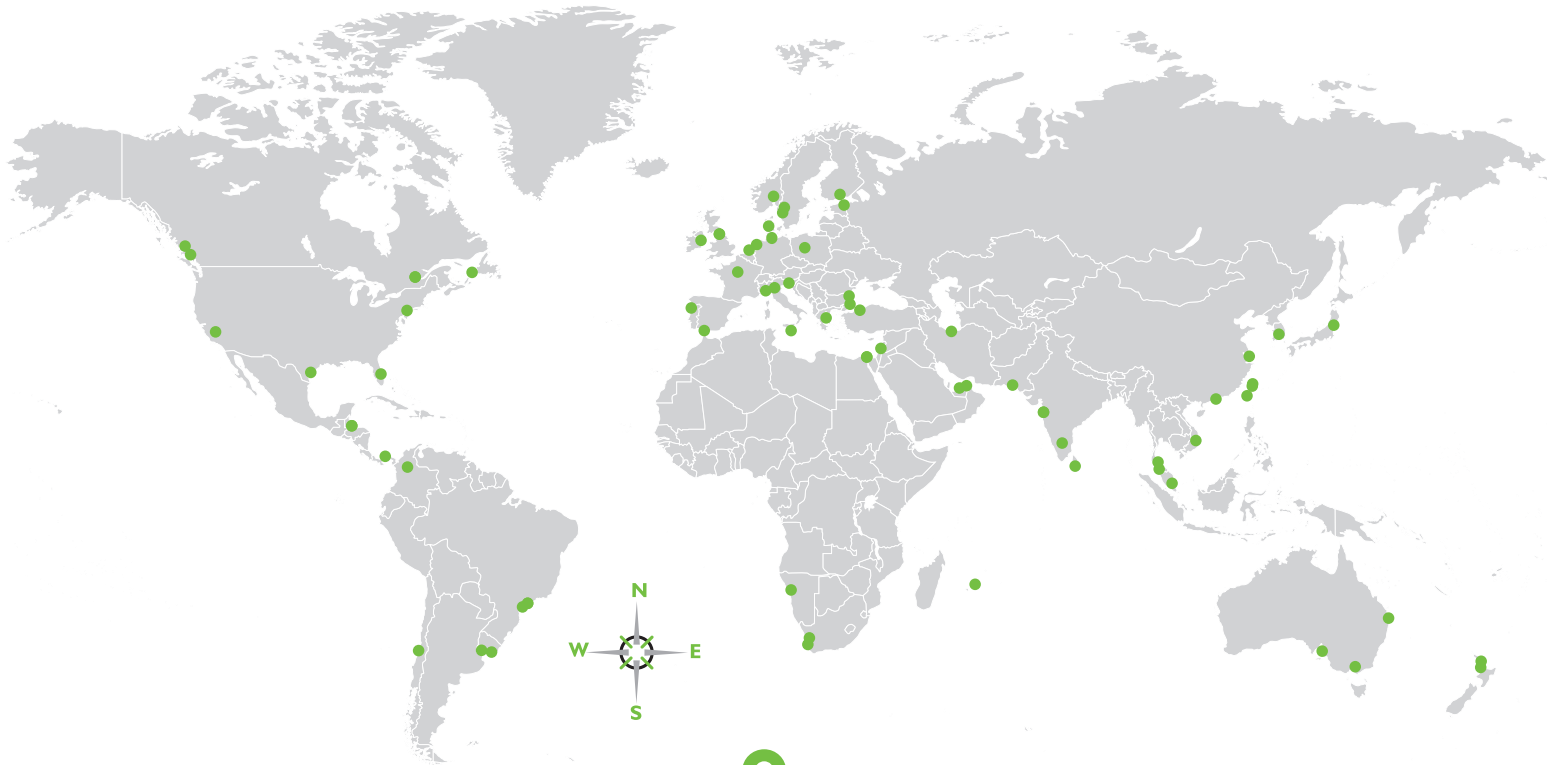

An **award-winning range** of EALs (Environmentally Acceptable Lubricants)



Regional stock points in over 40 locations



Ability and infrastructure to **respond quickly** to urgent requirements

Service & Support

30% of our workforce are employed in the technical team, focusing on Quality Control, R&D, OEM liaison and Technical Service allowing us to provide one-on-one dedicated customer support by our team of highly qualified experts.



Field Support



Lubrication Surveys and Recommendations



Equipment Reports and Analysis



Lubricant Analysis



Training

BENJN R. VICKERS & SONS LTD.

Registered Office
6 Clarence Road, Leeds,
LS10 1ND, United Kingdom

Registered in England
Company No. 00130013

Tel: +44 (0)113 386 7654
Email: inbox@vickers-oil.com
Web: www.vickers-oil.com

Follow us on   

Certified to the ISO 9001
Quality Standard and the
ISO 14001 Environmental
Management Standard



FM 01851 EMS 40717